

CUSTOMER APPROVAL

Cust Name	
Cust Signature	
Approval Date	

Customer Capacity	1.5L
Fill Point Volume	1505mL + 7.0mL/-5.0mL Nom @ 58mm
Brimful Volume	1521mL Nom
Weight	660g
Max. Gas Volumes	3*
Tilt Angle	18.9°
Process	B&B


*Gas rating applies only to AB

The WPA recommend that the label should be positioned at a minimum of 5mm above the bottom of the designated label panel and a minimum of 5mm below the top of the designated label panel with a maximum label height that is equal to or less 10mm than is shown as the designated label height on the glass drawing

Customer Specifications - Orora Glass




Number	AG248_R01	B		
Description	1.5L BVS Claret Lightweight	A		
Date & Revision	27/07/2021 Initial	Initial	Initial - was SD49_18	27/07/2021
Finish	R01 - 30x60 BVS	Rev	Description	Date

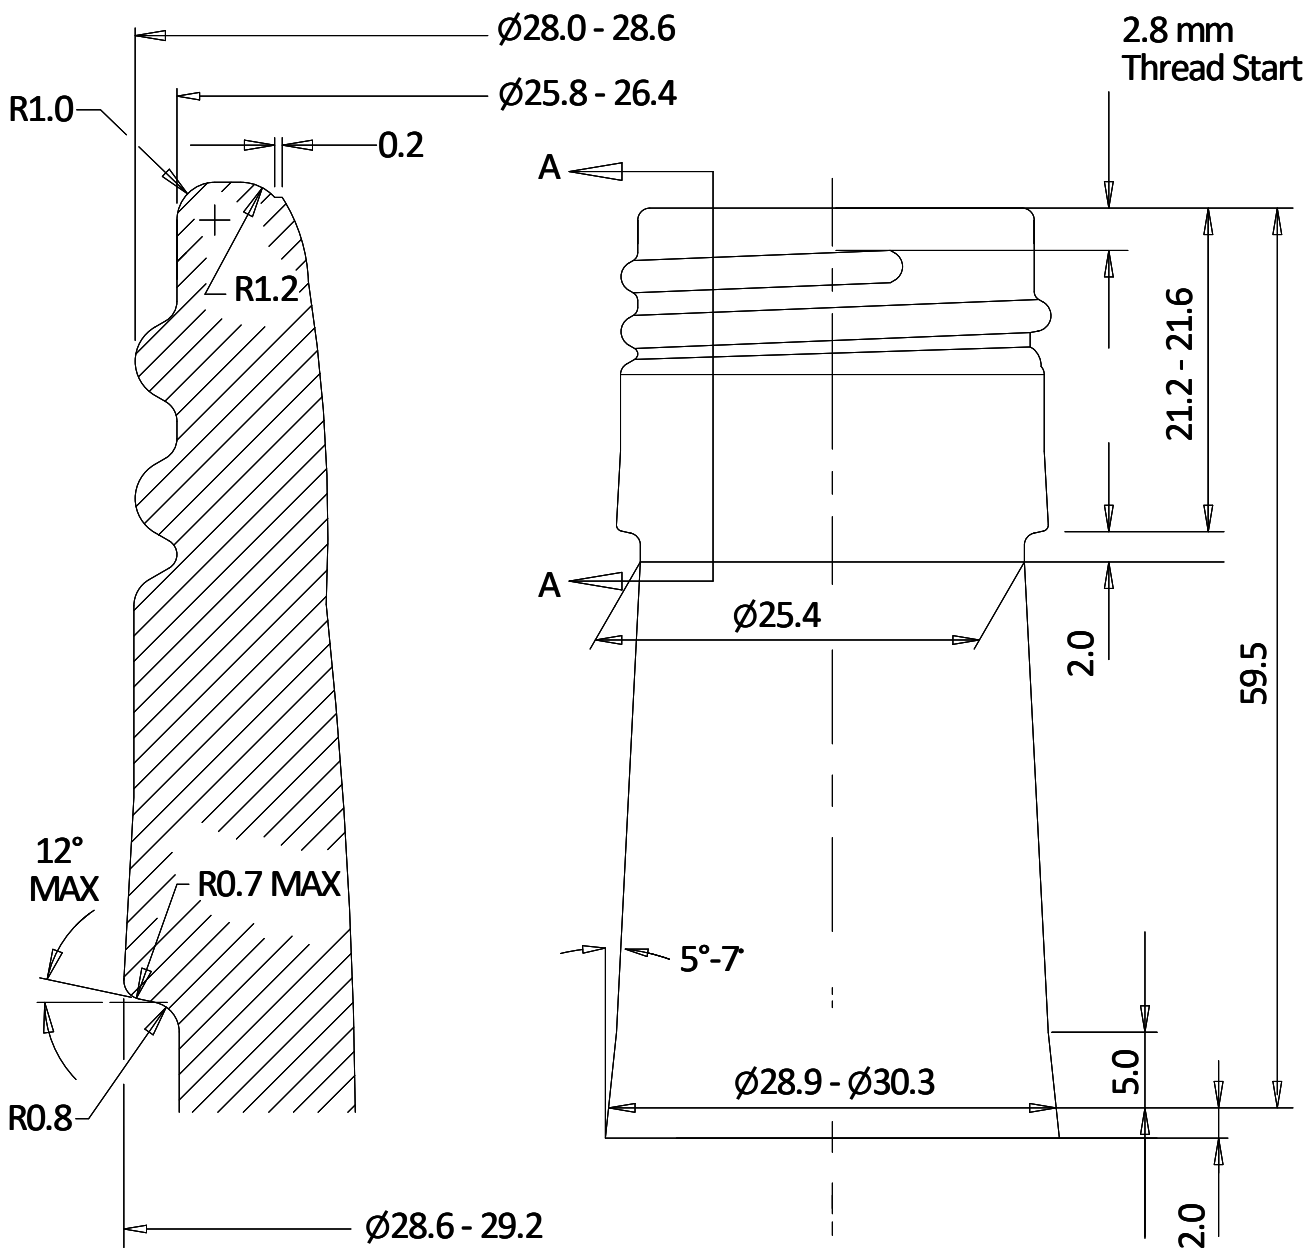

SECTION A-A

THREAD DETAIL

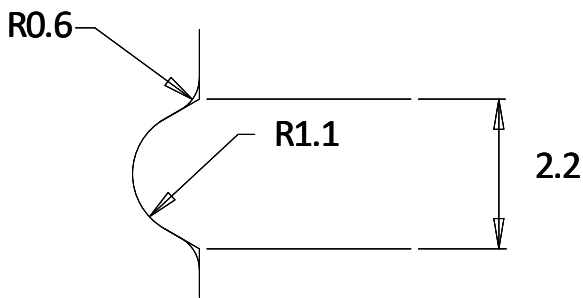

PITCH 3.63

Minimum through bore diameter is 17.50mm

Customer Specifications - Orora Glass



Finish Number R01

Description 30 x 60 BVS Finish

Date & Revision 23/11/2010 Rev E